

Mini Dynamic Canal

Grille

A wide range of design types and colours in anodized aluminium, various wood finishes and stainless steel

Electrical connection

Take 12 volt DC supply

Protection grille

Low-H₂O heat exchanger

Made from copper and aluminium, made "invisible" by a dark grey lacquer RAL 7024


Thermal activator fan units

Mini duct

From Sendzimir galvanized and dark grey lacquered steel plate; thickness 1mm, with connection holes on all sides

Seals


For the connection holes, made of black synthetic material. Hydraulic connection always on the left-hand side (connection on the right-hand side on request)

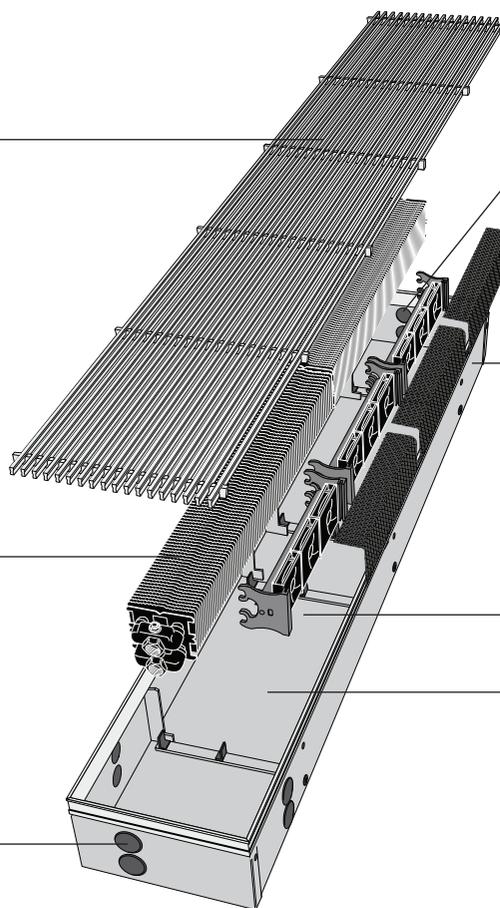


Installation

Options

Operating principle

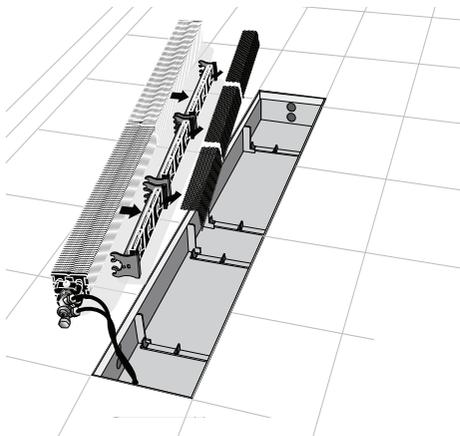

Flexible connections for fast assembly. Makes the Low-H₂O heat exchanger removable for maintenance.

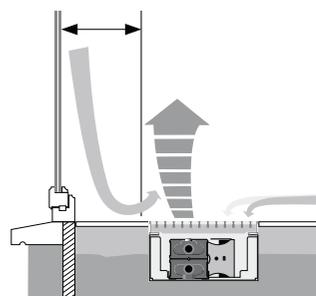

Sufficient space for curtains should be allowed.