




# MINI CANAL

*Energy*  
**SAVERS**

## FITTING OF OPTIONAL HEIGHT ADJUSTERS

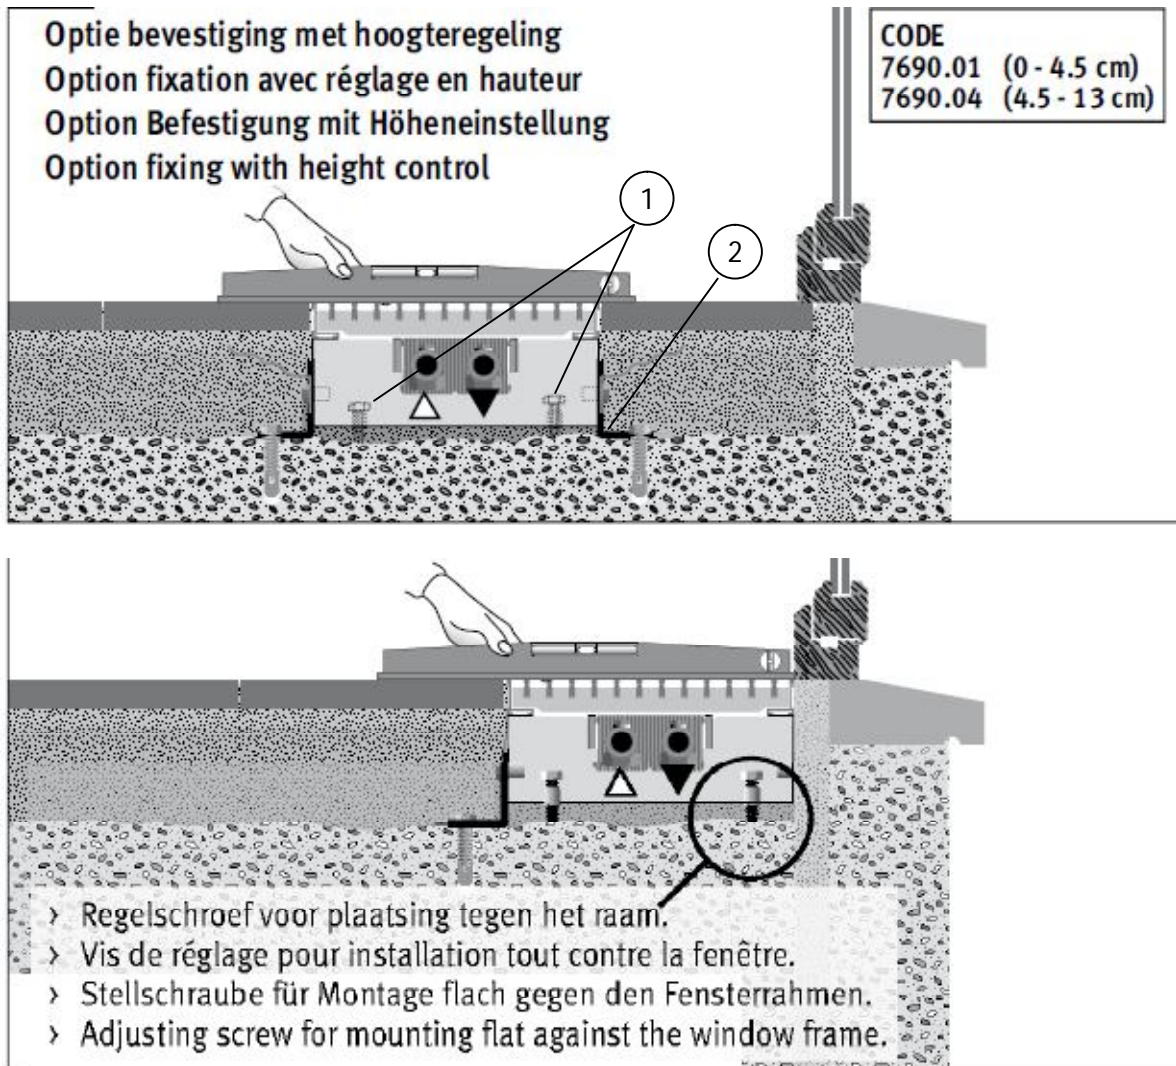

Levelling of the trench heater is achieved using the jacking screws (1). Once a level trench is achieved, the "L" profile bracket (2) can be fitted in the required location and tightened to the side of the trench. The base of the "L" profile can now be fastened to the floor (due to the wide variety of floors, Jaga do not supply these fasteners).

This process must be completed before final screeding of finished floor.